


PRIME SPECIMENS

The Collection
By
SLCC Commercial






Introducing SLCC
Commercial.
Style, quality and
performance
flooring designed
for commercial
spaces

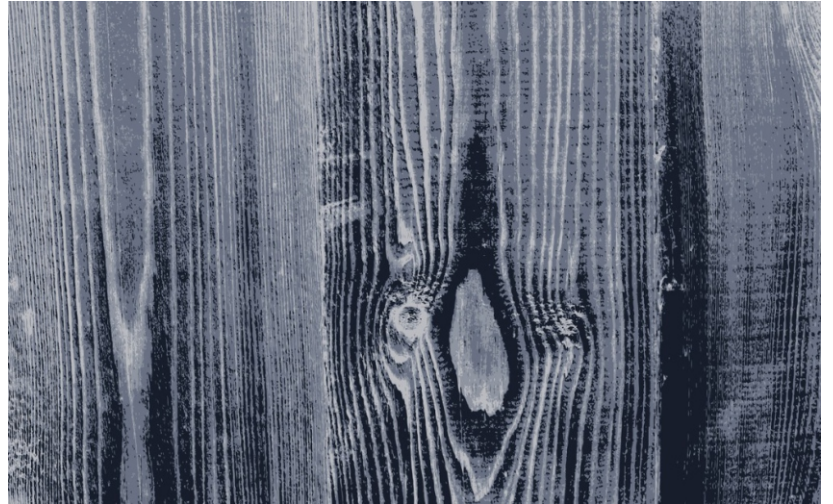

PRIME SPECIMENS COLLECTION

Like art imitating reality, **Prime Specimens Collection** captures the essence of three different surfaces, with a modern flair. Whether it be the characteristic graining of oak and maple species wood, or the subtle pattern and shade variations of concrete, or the distinct veining of marble stone, Prime Specimen's modern interpretation brings a fresh look to common surfaces. From the clean modern look of **SLEEK WOODS**, to the industrial styling of **CREME DE LA CRETE**, or the wide plank format of **MODERN MARBLE**, this exciting new collection is sure to collaborate with a multitude of finishes in any space. Old things become new again with **Prime Specimens Collection**.

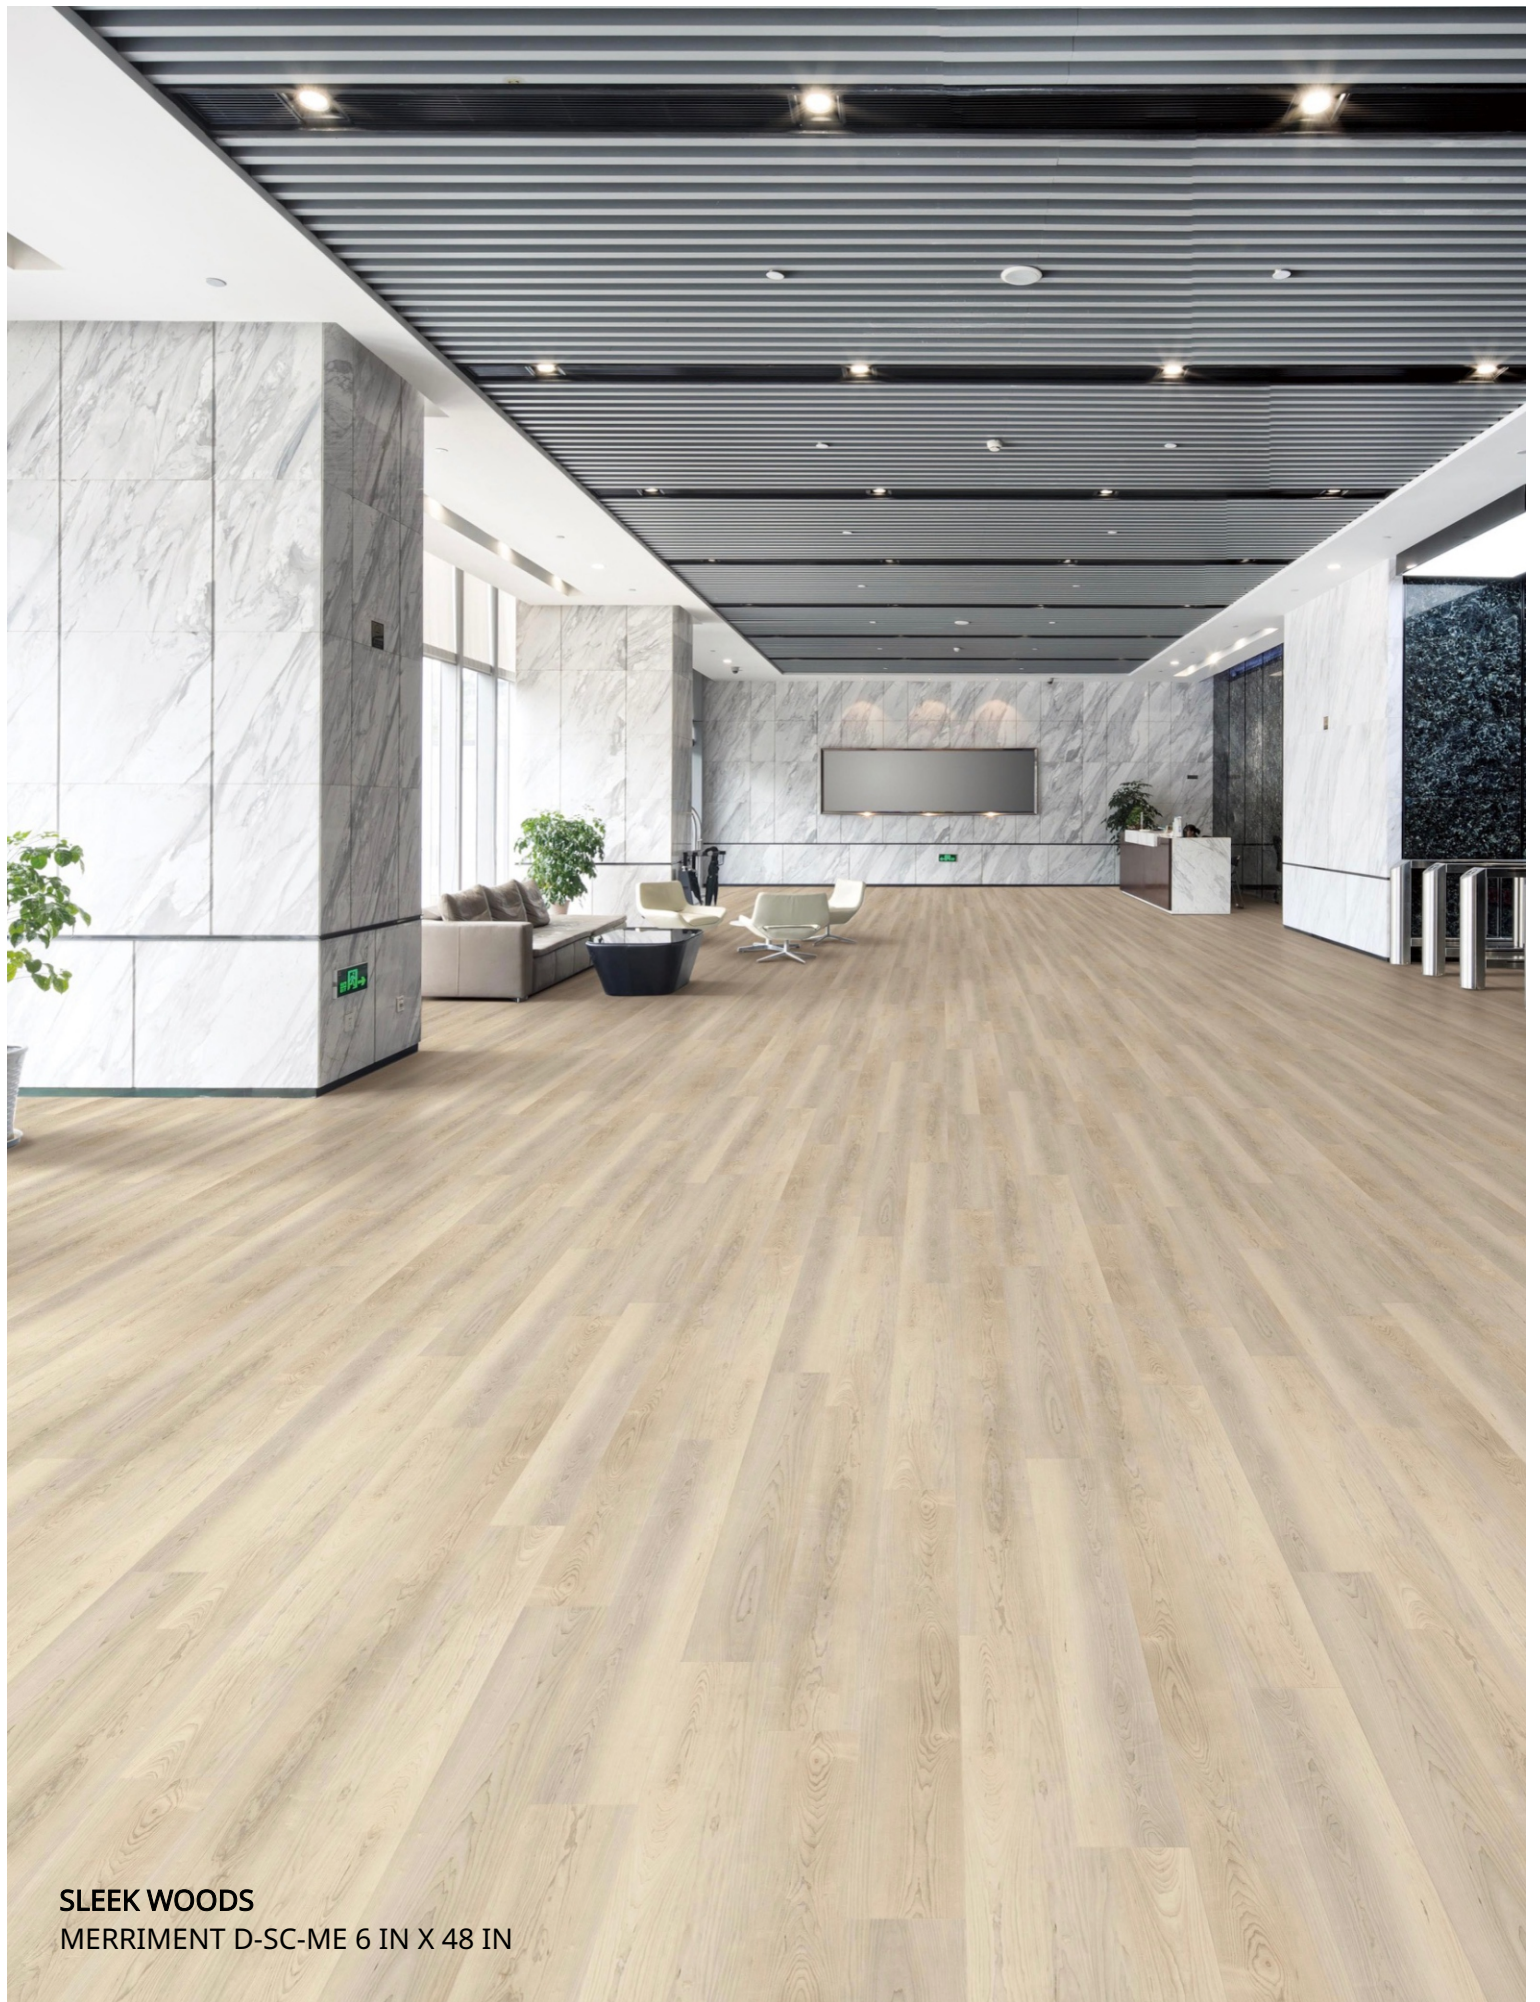

SLEEK WOODS
MERRIMENT D-SC-ME 6 IN X 48 IN

PRIME SPECIMENS COLLECTION

SLEEK WOODS



MERRIMENT D-SC-ME



LUZ D-SC-LU



ALBA D-SC-AL



ROSY DAWN D-SC-RD



DEL SOL D-SC-DS




SUNRISE D-SC-SU



SPECTACLE D-SC-SP



DAYBREAK D-SC-DA



TAHOE D-SC-TA

PRODUCT DETAILS

SLEEK WOODS


Product Type	Luxury Vinyl Plank
Classification	ASTM F3261-Grade 1, Type B-Embossed
Overall Thickness	2.5mm (0.0984")
Wear Layer	20mil (0.5mm)
Edge Profile	Micro Bevel
Surface Finish	Polyurethane Matte Coating
Embossing	Random EIR
Size	6" W x 48" L (152.4x1219.2mm)
Square Feet Per Plank	2.00 SQFT/PLANK
Square Feet Per Carton	46.00 SQFT/CTN
Pieces Per Carton	23 PIECES/Carton
Weight Per Carton	20.59 KGS/CTN 45.3 LBS/CTN
Carton Per Pallet	54 Cartons/PLT
Installation Method	Glue down
Smoke Density	ASTM E662- Passes - Flaming & Non Flaming \leq 450
IIC	ASTM E492 & ASTM E989 - Result: 48

SUSTAINABILITY

Material	100% Virgin Vinyl
Certification	VOC A+ & Floor -Score® certified

SERVICE


Warranties	15 Years Commercial Limited Warranty
------------	--------------------------------------

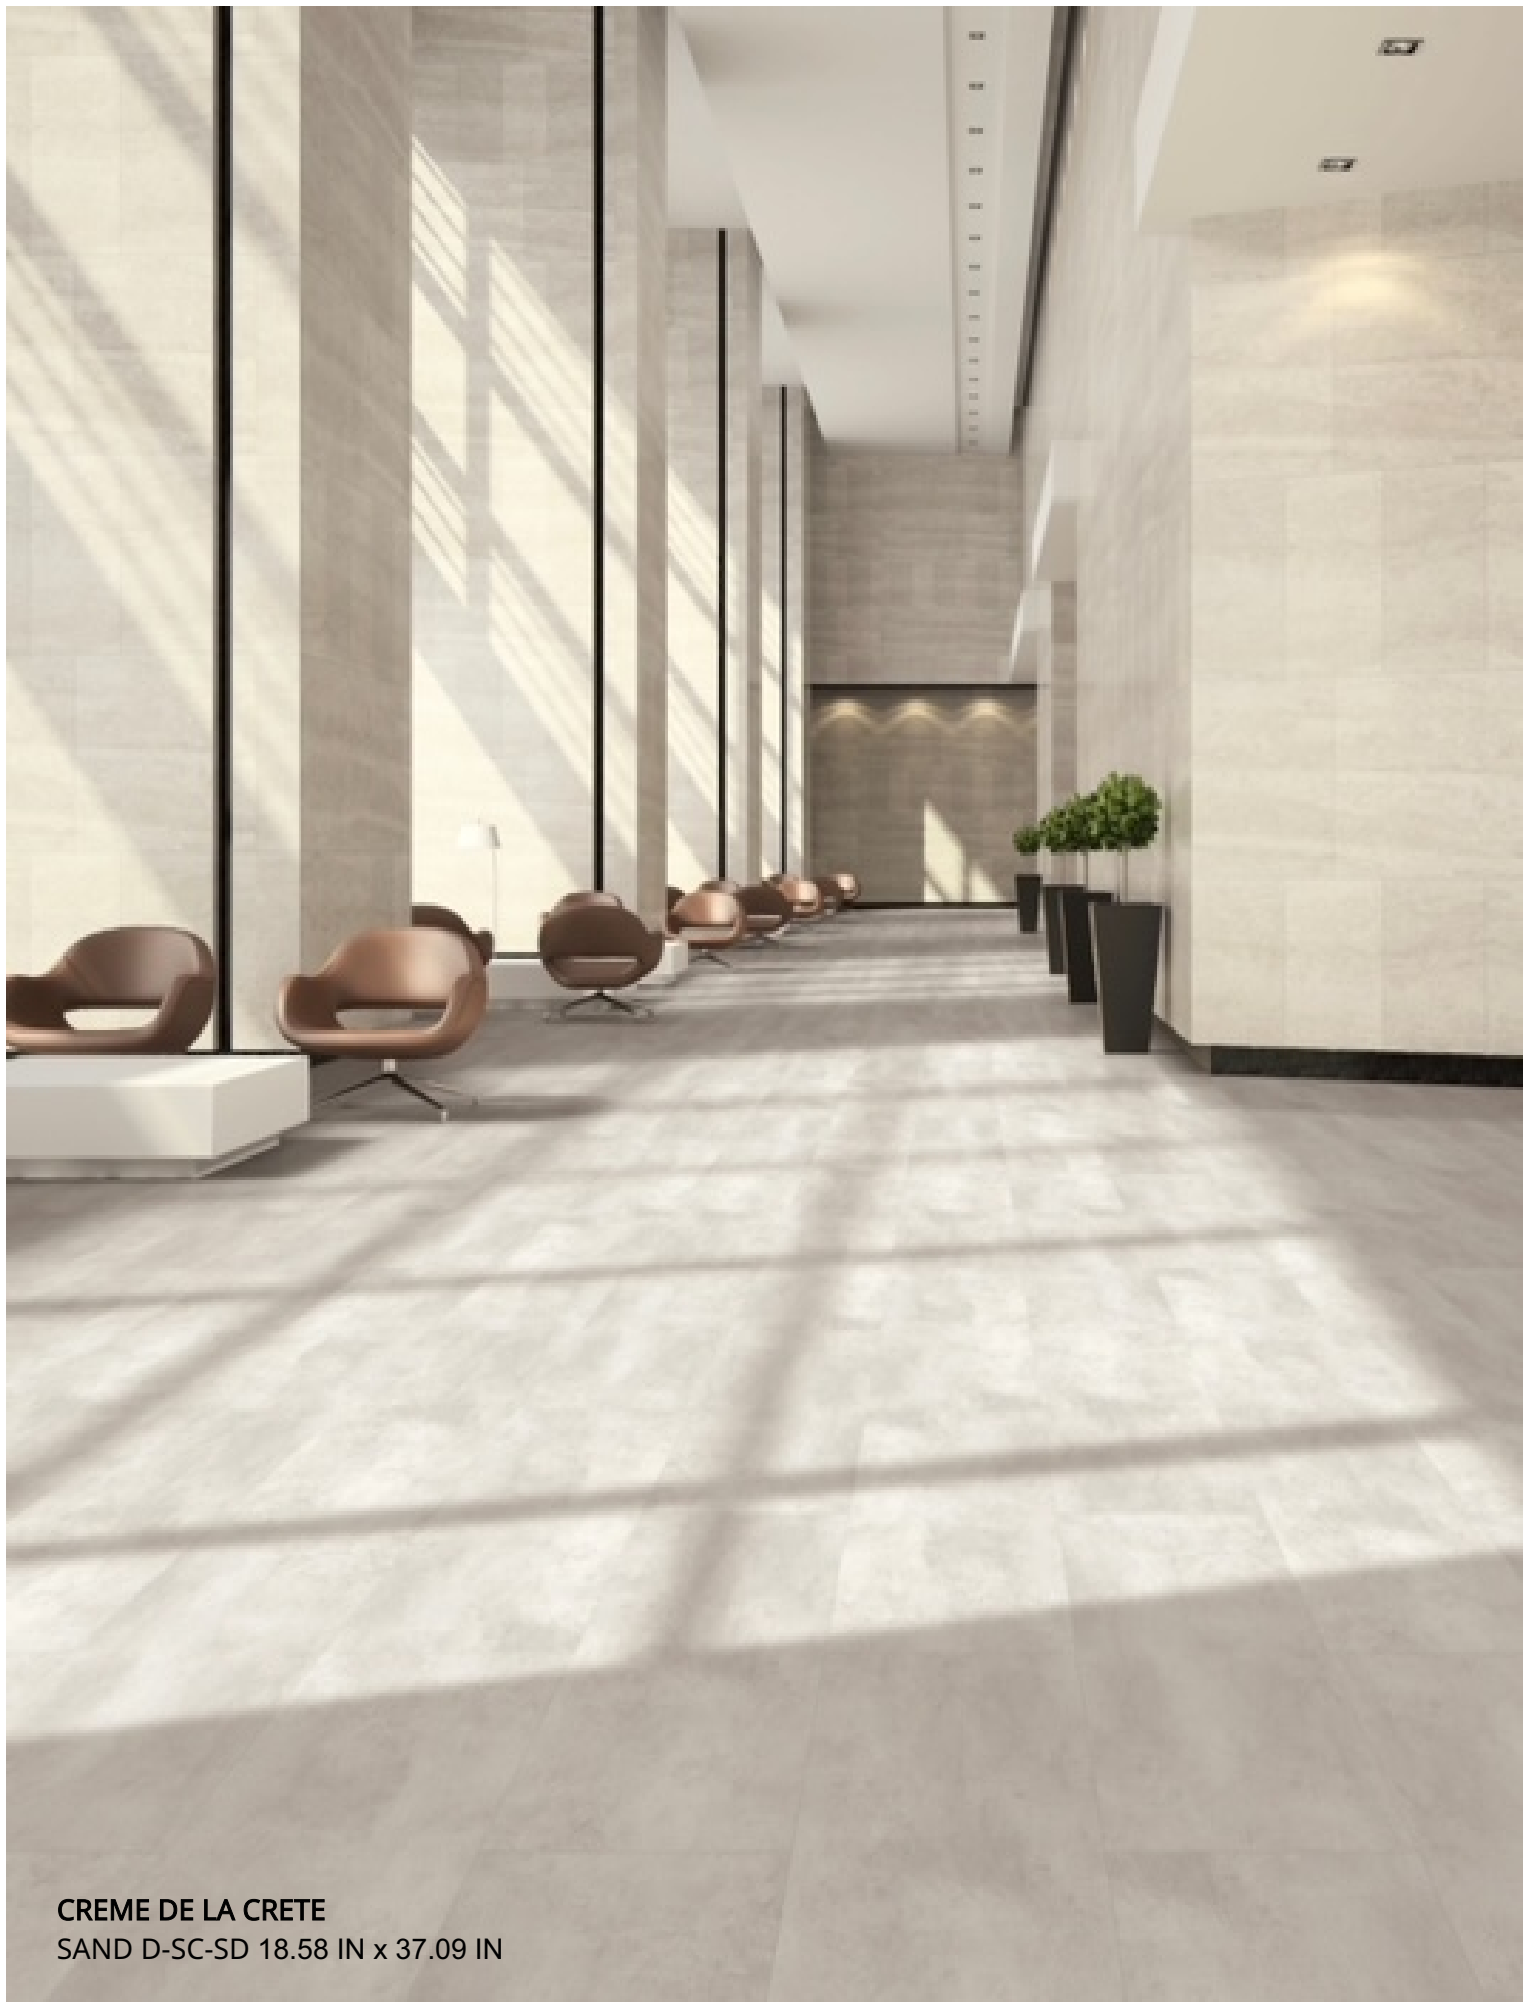


CREME DE LA CRETE
SAND D-SC-SD 18.58 IN x 37.09 IN

PRIME SPECIMENS COLLECTION

CREME DE LA CRETE



SAND D-SC-SD



STONE D-SC-ST



PEWTER D-SC-PE

PRODUCT DETAILS

CREAME DE LA CRETE

Product Type	Luxury Vinyl Tile
Classification	ASTM F3261-Grade 1, Type B-Embossed
Overall Thickness	2.5mm (0.0984")
Wear Layer	20mil (0.5mm)
Edge Profile	Square Edge
Surface Finish	Polyurethane Matte Coating
Embossing	Sandy
Size	18.58" W x 37.09" L (472x942mm)
Square Feet Per Plank	4.78 SQFT/PLANK
Square Feet Per Carton	47.86 SQFT/CTN
Pieces Per Carton	10 PIECES/Carton
Weight Per Carton	21.72 KGS/CTN 47.8 LBS/CTN
Carton Per Pallet	54 Cartons/PLT
Installation Method	Glue down
Smoke Density	ASTM E662- Passes - Flaming & Non Flaming \leq 450
IIC	ASTM E492 & ASTM E989 - Result: 48

SUSTAINABILITY

Material	100% Virgin Vinyl
Certification	VOC A+ & Floor -Score®certified

SERVICE


Warranties	15 Years Commercial Limited Warranty
------------	--------------------------------------




MODERN MARBLE
ALABASTER D-SC-AB 12 IN X 24 IN

PRIME SPECIMENS COLLECTION


MODERN MARBLE



ALABASTER D-SC-AB



PALACE GRAY D-SC-PG



ONYX D-SC-ON

PRODUCT DETAILS

Product Type
Classification
Overall Thickness
Wear Layer
Edge Profile
Surface Finish
Embossing
Size
Square Feet Per Plank
Square Feet Per Carton
Pieces Per Carton
Weight Per Carton
Carton Per Pallet
Installation Method
Smoke Density
IIC

MODERN MARBLE

Luxury Vinyl Tile
ASTM F3261-Grade 1, Type B-Embossed
2.5mm (0.0984")
20mil (0.5mm)
Square Edge
Polyurethane Matte Coating
Sandy
12" W x 24" L (304.8x609.6 mm)
2.00 SQFT/TILE
46.00 SQFT/CTN
23 PIECES/CTN
20.59 KGS/CTN 45.3 LBS/CTN
54 Cartons/PLT
Glue down
ASTM E662- Passes - Flaming & Non Flaming \leq 450
ASTM E492 & ASTM E989 - Result: 48

SUSTAINABILITY

Material 100% Virgin Vinyl
Certification VOC A+ & Floor -Score® certified

SERVICE


Warranties 15 Years Commercial Limited Warranty

PRIME SPECIMENS COLLECTION

SLEEK WOODS	6 IN X 48 IN
CRÈME DE LA CRETE	18.58 IN X 37.09 IN
MODERN MARBLE	12 IN x 24 IN

LVT

Total Thickness: 2.5 mm
 Wear Layer: 20 mil
 Installation type: Direct Glue

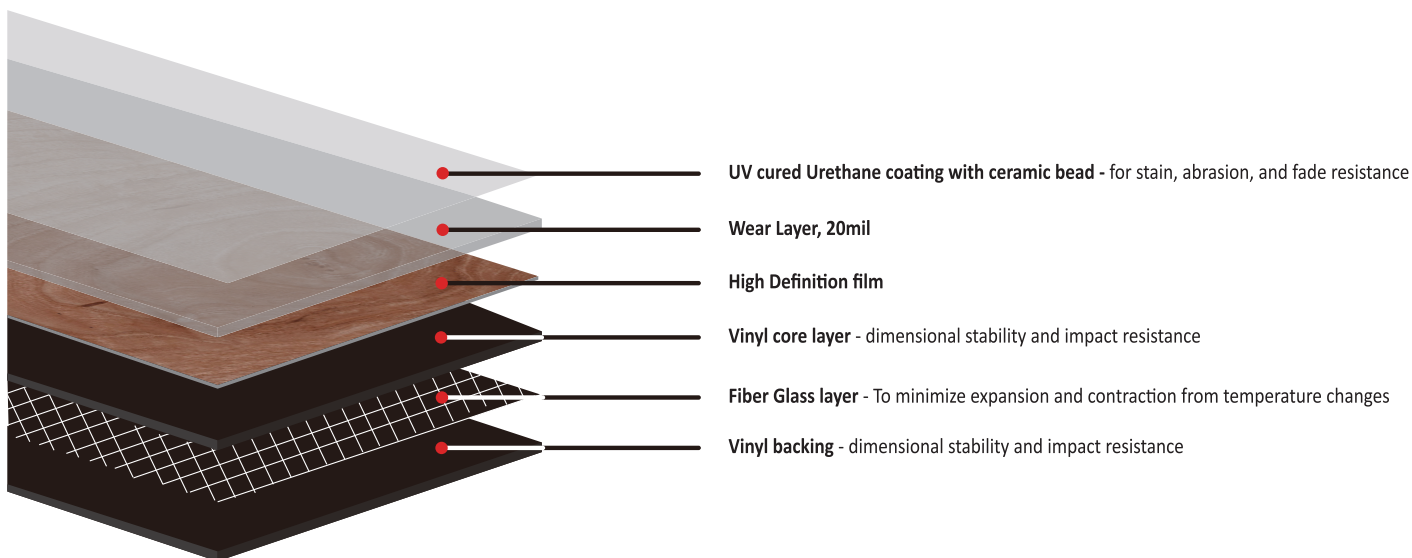

RECOMMENDED INSTALLATIONS

SLEEK WOODS



Herringbone




Random Ashlar

CREME DE LA CRETE



Random Ashlar




Monolithic

MODERN MARBLE



Random Ashlar



Monolithic

For Random Ashlar installation, stagger tiles 12 inches minimum.

For a copy of complete installation instructions, please contact your SLCC Commercial sales representative or

Customer service:
 (626)-369-8999
 Info@slccflooring.com
 www.slccflooring.com

- Note- printed images of colors and patterns of flooring styles are intended solely as a guideline. Actual color and pattern of flooring material may vary from any printed or digital representation.
- SLCC Commercial brand LVT adhesive is recommended for installation.
- Please consult your authorized SLCC Flooring dealer to assist you with your purchase.







LOS ANGELES

13668 Valley Blvd., Unit C-1
City of Industry, CA 91746
Tel:(626)369-8999
Fax:(626)552-3790

SAN JOSE

2211 Ringwood Ave.
San Jose, CA 95131
Tel:(408)433-3328
Fax:(408)549-9866

DALLAS

1800 Diplomat Dr. Ste. 200
Farmers Branch, TX 75234
Tel:(469)341-8206
Fax:(972)942-2016

MEXICO

Calle Chunique 1834
Colnia Herrera
Tijuana, BC 22534
Tel: +52(664)899-2208